

750 W Touchscreen TWTA

Compact and Efficient

Provides 750 watts of power in a 5 rack unit package, digital ready, for wideband, single- and multi-carrier satellite service in the 13.75 to 14.50 or 12.75 to 14.50 GHz frequency range, with other frequency ranges available as well. Ideal for transportable and fixed earth station applications where space and prime power are at a premium. CAN-Bus architecture improves noise immunity and reliability.

Touchscreen Graphical Interface

State of the art touchscreen interface with both amplifier and/or system level control capabilities. Includes fault logs, parameter trending and scopescreen for monitoring performance. Internal switch control eliminates need for external controllers.

Global Applications

Meets International Safety Standard EN-60215, Electromagnetic Compatibility 2004/108/EC and Harmonic Standard EN-61000-3-2 to satisfy world requirements.

Easy to Maintain

Modular design and built-in fault diagnostic capability with convenient and clearly visible indicators for easy maintainability in the field. A USB port is available for uploading new firmware and system configurations, and downloading logs and system configurations for cloning to other units.

Worldwide Support

Backed by over 35 years of satellite communications experience, and CPI's worldwide 24-hour customer support network that includes more than 20 regional factory service centers.




Models T5UI

750 watt Ku-band Touchscreen TWTA for **satellite uplink applications**

OPTIONS

- Integral linearizer
- Remote control panel
- Redundant and power combined sub-systems
- External receive band reject filter (increases loss by a minimum of 75 dB up to 12.75 GHz)
- SNMP compatibility
- LifeExtender™/LifePredictor
- High altitude/temperature kit
- L-band block upconverter (BUC) --- specifications for when BUC is included are not contained in this document. Contact CPI for details.
- Multi-band block upconverter (BUC) --- specifications for when BUC is included are not contained in this document. Contact CPI for details.

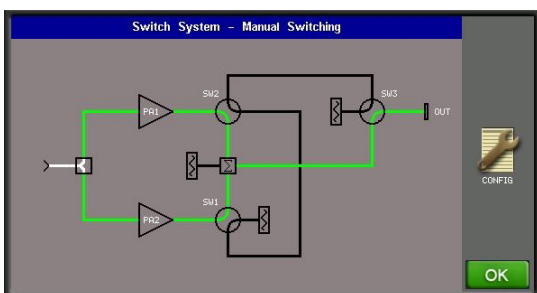

Touchscreen TWTA Sample Redundancy System Schematic Display; Various Configurations Available



811 Hansen Way, PO Box 51625
Palo Alto, CA 94303 USA
tel: +1 (650) 846-3803
fax: +1 (650) 424-1744
e-mail: satcommarketing@cpil.com
website: www.cpii.com/satcom

750 W Ku-Band TouchPower™ Touchscreen TWTA

Specification	Model T5UI std. band	Model T5UI ext. band
Output Frequency	13.75 to 14.50 GHz	12.75 to 14.50 GHz
Output Power (min.) TWT Flange (P _{sat} , CW)	750 W (58.75 dBm) min. 665 W (58.25 dBm) min.	750 W (58.75 dBm) min. 665 W (58.25 dBm) min.
Gain	70 dB min. at rated power, 80 dB max; 70 dB min. at small signal, 75 dB max.	
RF Level Adjust Range	0 to 30 dB (via PIN diode attenuator), 0.1 dB steps	
Gain Stability Over temp, constant drive Over ±10°C, constant drive	±0.25 dB/24 hour max,max. at constant drive and temperature, after 30 minute warmup 2.0 dB pk-pk max. at 48 dBm output power 1.5 dB pk-pk max. at 48 dBm output power	
Small Signal Gain Slope	±0.04 dB/MHz max.	
Small Signal Gain Variation	1.0 dB pk-pk max. across any 80 MHz; 2.5 dB pk-pk max. across 750 MHz; 4.5 dB pk-pk max. across 1750 MHz	
Input/Output VSWR	1.3:1 max.	
Load VSWR	2.0:1 continuous operation; 1.5:1 for full spec. compliance; any value operation without damage	
Phase Noise	-12 dB IESS-308/309 phase noise profile; -52 dBc AC fundamentals; -50 dBs sum of spurs (370 Hz to 1 MHz)	
AM/PM Conversion	2.5°/dB max. for a single-carrier at 6 dB below rated power. Improves to 2.0°/dB typ. at 3 dB OBO with optional linearizer	
Harmonic Output	-70 dBc at rated power, second and third harmonics	
Noise Density	<-150 dBW/4 kHz, 10.70 to 12.75 GHz; <-75 dBW/4 kHz passband; <-72 dBW/4 kHz passband with linearizer option	
NPR	-19 dB at 4 dB OBO with optional linearizer	
Intermodulation - with respect to each or two equal carriers 5 MHz apart	-23 dBc or better at 51.13 dBm; -26 dBc or better at 55.25 dBm with linearizer	
Spectral Regrowth	-30 dBc at 1 symbol rate at 3 dB OBO with optional linearizer, QPSK and OQPSK	
Group Delay	0.01 ns/MHz linear max; 0.005 ns/MHz ² parabolic max; 0.5 ns pk-pk ripple max.	
Primary Power	Voltage: Single phase, 208-240 VAC ±10%; Frequency: 47-63 Hz, 15 A max.	
Power Consumption	2.2 kVA typ. at P _{sat} ; 2.4 kVA max; 1.8 kVA typ. at P _{LIN}	
Power Factor	0.95 min; 0.99 typ.	
Inrush Current	200% max.	
Ambient Temperature	-20°C to +60°C operating, -40°C to +70°C non-operating	
Relative Humidity	95% non-condensing	
Altitude	10,000 ft. with standard adiabatic derating of 2°C/1000 ft. operating; 50,000 ft. non-operating	
Shock and Vibration	Designed for normal transportation environment per section 514.4 MIL-STD-810G. Designed to withstand 20G at 11 ms (1/2 sine pulse in non-operating condition)	
Cooling	Forced Air with integral blower. Rear air intake and exhaust. Maximum external pressure loss allowable: 0.5" water column	
Connections	RF Input: Type N Female; RF output: WR-75 waveguide flange; RF output monitor: Type N Female	
M&C Interface	RJ45 Ethernet, includes embedded GUI control; RS422/485, RS232 serial interface	
USB Port	Download/Upload software, logs	
Dimensions, W x H x D	19 x 8.75 x 24 inches (483 x 222 x 610 mm)	
Weight	78 lbs (35 kg) nom.	
Heat Dissipation	1,440 watts to duct; 360 watts to room	
Acoustic noise	68 dBA (as measured at 3 ft.) nom.	